


FIXTURE TYPE _____

PROJECT NAME _____

LOCATION _____

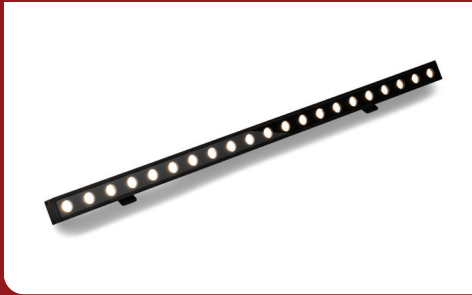

Zolo™ 3

ULTRA-THIN LED WASHER/GRAZER

Store in a Temperature-Controlled Environment.



I Description

Zolo 3 is an interior washer/grazer with a small form factor, great light output, and is highly customizable to perfectly fit your project.

I Features

- Multiple Optics Options Available
- Extruded Aluminum Alloy Housing
- Available in Titanium Gray, Black, or White Finish
- Multi-Volt 24VDC Remote Driver (Sold Separately)
- Daisy Chain Multiple Fixtures
- Optional Glare Control Accessories

I Specifications

Dimming Options PWM, Triac, 0–10V, DMX 512, ELV

Input Voltage 24V DC/Constant Voltage

Watts per Foot 6W/ft*

Lumen per Watt 100 lm/W

Lumen per Foot 600 lm/ft

Beam Spread 15°×30°, 15°, 30°, 60°, 80°

Max Run Length 16 ft

CRI 85*

Operating Temp. -40°F (-40°C) to 140°F (60°C)

I Product Code Builder

Item	Length	Power*	Temp/Color*
Z3 Z3—Zolo 3	<input type="text"/>	6W 6W—6W/ft	<input type="text"/>
	1—11.81" (300mm) 2—23.62" (600mm) 3—35.43" (900mm) 4—47.24" (1200mm)		27—2700K 30—3000K 35—3500K 40—4000K
Beam Angle	Mounting	Finish*	Option
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
1530—15°×30° 15—15° 30—30° 60—60° 80—80°	S1—1" CP—Mounting Clip	TG—Titanium Gray BK—Black WH—White	NA—None GS—Solid Glare Shield LV—Louver ALV—Asymmetric Louver



Example: Z3-1-6W-27-1530-S1-TG-NA

* Customizable—Consult Factory



Dimensions

Length	11.81" (300mm), 23.62" (600mm), 35.43" (900mm), 47.24" (1200mm)
Width	1.02" (26.0mm)
Height	0.83" (21.0mm)

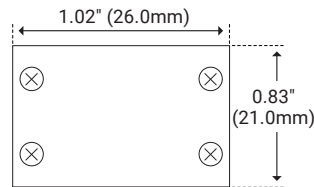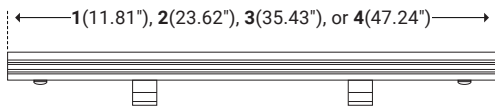


Mounting

1" Stand Off




Unit Number	Z-03-S1
Ordering Code	S1
Length	0.70" (18.0mm)
Width	1.25" (32.0mm)
Stand Off Height	1.06" (27.0mm)
Rotation	70°



Mounting Clip




Unit Number	Z-03-CP
Ordering Code	CP
Length	0.79" (20.0mm)
Width	0.70" (17.7mm)
Stand Off Height	0.45" (11.5mm)




Options

Solid Glare Shield




Unit Number	Z-03-GS
Ordering Code	GS
Width	1.02" (26.0mm)
Height	1.46" (37.0mm)



Louver



Unit Number	Z-03-LV
Ordering Code	LV
Louver Width	1.20" (30.5mm)
Louver Height	0.51" (13.0mm)
Overall Height	1.04" (26.5mm)






Options

Asymmetric Louver



Unit Number	Z-03-ALV
Ordering Code	ALV
Louver Width	1.20" (30.5mm)
Louver Height	0.51" (13.0mm)
Overall Height	1.04" (26.5mm)



Power & Connectors Options

Power Lead



Unit Number	Length
Z-03-FML-6	6ft
Z-03-FML-20	20ft
Z-03-FML-50	50ft



Connector




Unit Number	Length
Z-03-FMC-1	1ft
Z-03-FMC-2	2ft
Z-03-FMC-6	6ft




I Wiring Options

Primary Side Dimming (120–277V)

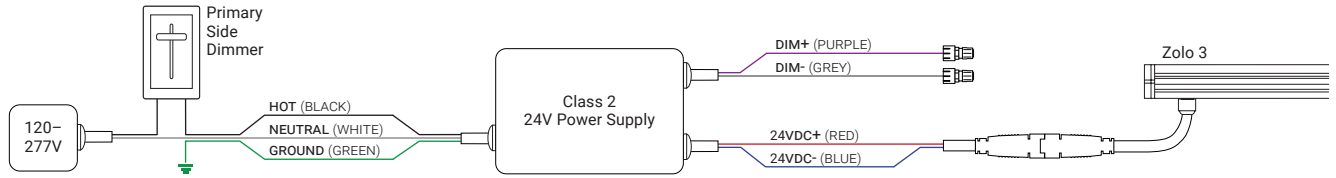

Primary Side Switching (120–277V)

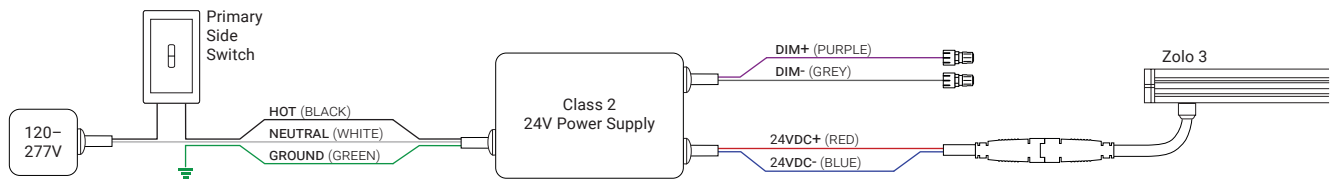

0–10V Dimming (120–277V)

