Archiline Pro_W


Project:

Туре:

Linear | 6 x powerLEDs 32 W | CRI 80 | 3000K | Elliptical | Anodized Aluminum | Wet location | 120V/277V on/off LL-E90458-W-25



Technical data	
Туре	Surface
Installation position	Wall lights - Ceiling
Installation environment	Outdoor
Light Source	LED
Optics	Elliptical
Light emission direction	frontal
Power	32 W
Operation	120V/277V + None interface
Source lumens	3629 lm
ССТ	3000 K
Color rendering index	80 Ra
Safety class	Class 2
IP	IP67
IK	IK08
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	Yes
Driver included	Integral driver
Dimmable article	No
Directional	Swivelling
total angle (vertical plane)	135 °
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable length	0.56 ft
Resin potting	No
Type of light emission	Single emission
Electrostatic discharge protection	4 KV
Surge protection	6 KV
Optics technology	Dark light
Product technological characteristics	TCS - TVS
Ordinary temperature on the glass	104 °F



Finishing casing	
Material	Aluminum 6060
Color	Anodized Aluminum
Process	20 µm anodizing
Finishing diffuser	
Material	Extra clear glass - Tempered
Color	transparent
Process	Silk-screening
Finishing bracket	
Material	Aluminum 6060
Color	Anodized Aluminum
Process	20 µm anodizing
Cables Electrification	on
Cable connector	Female Socket 3 Pin
IP (locked condition)	68

Male Plug 3 pin

Notes:

Cable connector

Archiline Pro_W

Linear | 6 x powerLEDs 32 W | CRI 80 | 3000K | Elliptical | Anodized Aluminum | Wet location | 120V/277V on/off | Base LL-E90458-W-25

Single emission lines for outdoor application. The warm white LED light source with a elliptical light distribution is composed of 6 powerled LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 3629 lm, with a 113.4 lm/W nominal luminous efficacy.

The device body is made of aluminium 6060 and features a anodised aluminum finish, processed by means of 20 μ m anodizing; the diffuser is made of extra clear glass - tempered with a silk-screening treatment. The ingress protection degree is IP67; the total weight is of 0 lbs.

The total absorbed power is 35 W. The power supply cable is included and features a 0.558 ft lenght.

and can be wall lights or ceiling-mounted.


Compliant with the EN 60598-1 standard and its specific provisions.

Energy efficiency class

This product contains 2 light sources of energy efficiency class E.

Light Output Ratio (LOR)	50 %	
Source lumens	3629 lm	
Delivered lumens	1831 lm	
Power	35 W	
Luminaire efficacy	52 lm/W	
Color temperature	3000 K	
Standard Deviation of Colour Matching	3 Step MacAdam	
Color rendering index	80 Ra	
LED Life / Failure Ratio		
L70 B10 C0 247450h (at Tj 60 Ta 25)		

OPTICAL	
Light distribution symmetry	Symmetrical 2
C0/C180 optics	46°

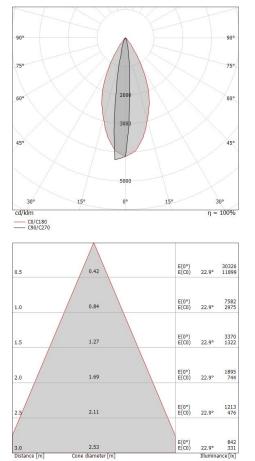

— C0/C180 (Half-peak divergence: 45.8°)

Archiline Pro_W

Archiline Pro_W | Lines | Accessories LL-E90458-W-25

Cable and connector Length 78.74 in; ; cable gland: no; external diameter: 0.37 in; colors: white - black - blue - green - brown - yellow-green.	Code E99057
Cable and connector Length 196.85 in; ; cable gland: no; external diameter: 0.37 in; colors: white - black - blue - green - brown - yellow-green.	Code E98147
Cable and connector Length 393.7 in; ; cable gland: no; external diameter: 0.37 in; colors: white - black - blue - green - brown - yellow-green.	Code E98146