

Linear

MiMi 208 Fixture Guide

KKDÖ

Indoor/Outdoor | Surface | Mid dynamic output up to 1000lm/m 338lm/ft)




Key applications

- ✓ Architectural detail
- ✓ Bathrooms
- ✓ Cove lighting
- ✓ Hand rail
- ✓ Indirect lighting
- ✓ Interior/Exterior
- ✓ Mirror back lighting
- ✓ Shelving display
- ✓ Special effect
- ✓ Under bench

Key features

- ✓ Custom lengths
- ✓ Diffusion: Spotting
- ✓ Dynamic white
- ✓ Extensive CCT range
- ✓ Form factor: Small
- ✓ IP54
- ✓ IP67
- ✓ Output mid



MOUNTING METHODS



KKCP-02 Clip



KKCP-14 Locking clip



KKBK-06 Fixed bracket



KKBK-05 Adjustable bracket



EB End Cap Bracket

Warm dim (Dynamic white)

Output Luminance %

min DIM1 Input Level max

— CH1 (Warmer)
— CH2 (Cooler)

LEDmix 207

CCT Selection 1 CCT Selection 2

LEDmix 209

CCT Selection 1 CCT Selection 2

LEDmix **warm dim** (Dynamic white) is a pre-programmed dimming curve setting enabling two different colour temperatures (CCTs) to blend harmoniously to achieve a warming lighting effect when dimmed.

KKDC LEDmix strips allow two separate CCT selections to be specified within the same PCB strip.

Use the table opposite to help determine which 2 CCT selections you require according to your preferred cool to warm dimming range.

**Note: The blended CCT is approx. 'cool-end' result at 100% brightness based on using the KKDC LED CCT specification.*

CCT Selection 1	CCT Selection 2	
	Blended CCT*	PCB CCT
1900K~	2000K 2100K 2200K 2300K 2500K 2600K 2700K 3000K 3500K	2100K PCB 2300K PCB 2500K PCB 2700K PCB 3000K PCB 3200K PCB 3500K PCB 4000K PCB 5000K PCB
2100K~	2200K 2300K 2400K 2600K 2700K 2800K 3000K 3600K	2300K PCB 2500K PCB 2700K PCB 3000K PCB 3200K PCB 3500K PCB 4000K PCB 5000K PCB
2300K~	2400K 2500K 2700K 2800K 2900K 3100K 3700K	2500K PCB 2700K PCB 3000K PCB 3200K PCB 3500K PCB 4000K PCB 5000K PCB
2500K~	2600K 2800K 2800K 3000K 3200K 3800K	2700K PCB 3000K PCB 3200K PCB 3500K PCB 4000K PCB 5000K PCB
2700K~	2900K 3000K 3100K 3400K 3900K	3000K PCB 3200K PCB 3500K PCB 4000K PCB 5000K PCB
3000K~	3100K 3300K 3500K 4000K	3200K PCB 3500K PCB 4000K PCB 5000K PCB
3200K~	3300K 3600K 4100K	3500K PCB 4000K PCB 5000K PCB
3500K~	3700K 4300K	4000K PCB 5000K PCB
4000K~	5100K	5000K PCB

Tuneable white

Channel Mix Ratio %

min DIM1 Input Level max

— CH1 (Warmer)
— CH2 (Cooler)

LEDmix 207

CCT Selection 1 CCT Selection 2

LEDmix 209

CCT Selection 1 CCT Selection 2

LEDmix **tunable white** enables two different LED colour temperatures (CCTs) to be specified within the same LEDmix strip.


Each CCT selection can then be independently controlled (via your dimming control system) to adjust the warm & cool light output (CCT selections) and thus tailor a blended light colour of your choosing.

CCT Selection 1	CCT Selection 2
1900K~	2100K 2300K 2500K 2700K 3000K 3200K 3500K 4000K 5000K
2100K~	2300K 2500K 2700K 3000K 3200K 3500K 4000K 5000K
2300K~	2500K 2700K 3000K 3200K 3500K 4000K 5000K
2500K~	2700K 3000K 3200K 3500K 4000K 5000K
2700K~	3000K 3200K 3500K 4000K 5000K
3000K~	3200K 3500K 4000K 5000K
3200K~	3500K 4000K 5000K
3500K~	4000K 5000K
4000K~	5000K

Linear

MiMi 208

Specification sheet



Dimension	H15/W13/L103.3-2020mm* (H0.59/W0.51/L4.07-79.53in*) *Nano Louvre = 1020mm/40.16in Max
PCB increment	166.7mm increment/2000mm* (6.56in increment/78.74in*) *Nano Louvre = 1000mm/39.37in Max
LED pitch	23.8mm - 84LED/m (0.94in - 26LED/ft) between same coloured LEDs
Chip	s-line Toyoda Gosei k-line Toyoda Gosei or Equivalent
Beam angle	75° (Clear Cover)/95° (Diffused cover)/35° (Nano Louvre)/63° (Black Cover)
Colours	s-line 1900K/2100K/2300K/2500K/2700K/3000K/3500K/4000K/5000K k-line 1900K/2100K/2300K/2500K/2700K/3000K/3500K/4000K/5000K
Bin/Step	s-line 2.5-step MacAdam ellipse k-line 3-step MacAdam ellipse
CRI	≥ 90
Lifetime	50,000 hours @ 25°C (50,000 hours @ 77°F)
Operating temp	T _a = -25 to 55°C (T _c max = 75.9°C) T _a = -13 to 131°F (T _c max = 168.6°F)
IP rating	IP54/IP67
Finish	Silver anodised
Cover/lens	Clear/Diffused/Diffused+Nano Louvre/Black
Mounting	Surface mounting via clips or brackets
Power feed	Sheathed hardwire tails or male/female connectors
Control	0-10V/1-10V/DMX/DALI



LED Grading Key

Exclusive Grade

s-line*	*KKDC tuned CCT range
2.5-step CCT range	CCT range

Base Grade

k-line	3-step commercial range Energy Star CCTs
---------------	---



PERFORMANCE DATA @ 2100K + 5000K

Power consumption	Supply voltage	Supply current
15.6W/m (4.75W/ft)	24V DC	0.65A/m (0.20A/ft)

Colour Rendering Index (CRI)

	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
k-line	94	97	98	93	93	96	92	83	60	93	94	82	95	99

	Clear	Diffused	Diffused + Nano Louvre	Black	CRI	R9	Rf	Rg
s-line	1000lm/m (338lm/ft) 63.9lm/W	820lm/m (277lm/ft) 52.4lm/W	210lm/m (64lm/ft) 13.5lm/W	600lm/m (183lm/ft) 38.5lm/W	93	62	-	-
k-line	920lm/m (280lm/ft) 58.7lm/W	730lm/m (223lm/ft) 46.6lm/W	188lm/m (57lm/ft) 12.1lm/W	550lm/m (168lm/ft) 35.3lm/W	92	60	-	-

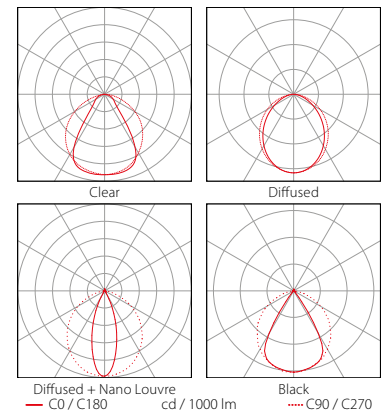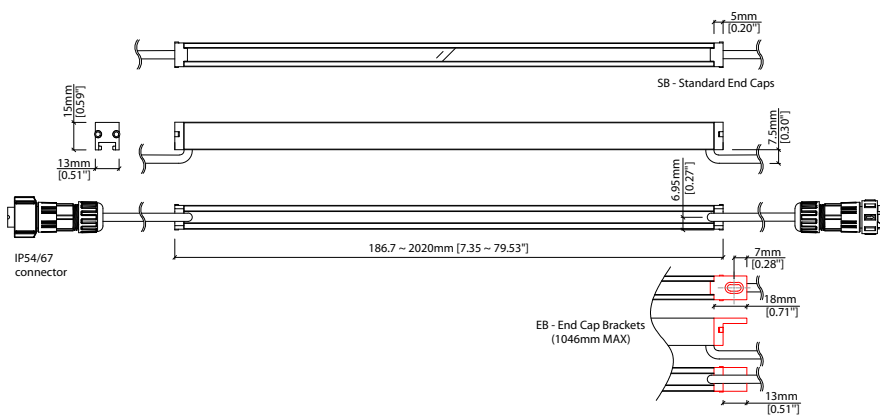

Data derived from independent UKAS/IESNA LM-79-08 accredited testing of production samples.

FIXTURE

Model	Finish	Cover ¹	Grade ²	LED	Colour (CCT)	Length Availability ³	IP	Cable Length	Power Feed ⁴	Fixing	Input																																																																																			
MiMi	MI	Silver Anodised	SA	Clear	B	s	208	1900K 19	m	186.7-2020mm 166.7mm increments	IP54 54 IP67 ⁷ 67	300mm/ 11.81"	0300	Single ø4.3mm sheath tail	S00A	Standard End Cap	SB	DC 24V	g																																																																											
																				Diffused	C	k	2100K 21	i	7.35-79.53in 6.56in increments	2300K 23	2500K 25	2700K 27	3000K 30	3500K 35	4000K 40	5000K 50	Double ø4.3mm sheath tail	D00A	End Cap Bracket	EB																																																										
																																					Diffused + Nano Louvre ^{5,6}	CN	Y	2700K 27	3000K 30	3500K 35	4000K 40	5000K 50	Single ø4.3mm sheath IP67 connector ⁸	S67A	Double ø4.3mm sheath IP67 connector ⁸	D67A																																														
																																																	Black	Y	2700K 27	3000K 30	3500K 35	4000K 40	5000K 50	Single ø4.3mm sheath IP67 connector ⁸	S67A	Double ø4.3mm sheath IP67 connector ⁸	D67A																																			
																																																												2700K 27	3000K 30	3500K 35	4000K 40	5000K 50	Single ø4.3mm sheath IP67 connector ⁸	S67A	Double ø4.3mm sheath IP67 connector ⁸	D67A																										
																																																																					3000K 30	3500K 35	4000K 40	5000K 50	Single ø4.3mm sheath IP67 connector ⁸	S67A	Double ø4.3mm sheath IP67 connector ⁸	D67A																		
																																																																													3500K 35	4000K 40	5000K 50	Single ø4.3mm sheath IP67 connector ⁸	S67A	Double ø4.3mm sheath IP67 connector ⁸	D67A											
																																																																																				4000K 40	5000K 50	Single ø4.3mm sheath IP67 connector ⁸	S67A	Double ø4.3mm sheath IP67 connector ⁸	D67A					
																																																																																										5000K 50	Single ø4.3mm sheath IP67 connector ⁸	S67A	Double ø4.3mm sheath IP67 connector ⁸	D67A
S67A	Double ø4.3mm sheath IP67 connector ⁸	D67A																																																																																												
			Double ø4.3mm sheath IP67 connector ⁸	D67A																																																																																										

¹ Refer to **Cover Options** on **Options** pages

² Refer to **LED Grading Key** on **Specification sheet** page

³ Refer to **Length Availability List** or enter total run length instead of length code

⁴ Refer to **Power Feed Options** on **Options** pages

⁵ Max length available with Nano Louvre is 1020mm

⁶ LEDmix requires two colour temperature choices

⁷ Due to the clear, flush potted polyurethane top layer on IP67 MiMi a colour shift of +/-20K should be expected

⁸ IP67 connectors are used for both IP67 and IP54 product housings

Code Example:

MI	-	SA	-	CN	-	s	-	208	-	2150	-	m	-	520	-	67	-	0300	-	S00A	-	EB	-	g
MiMi		Silver Anodised		Diffused + Nano Louvre				208		2100K+5000K		520.1mm		IP67		300mm/11.81"		Single ø4.3mm sheath tail		S00A		End Cap Bracket		DC 24V

ACCESSORIES

Mounting Accessories

KKCP-02	Clip (1no.)
KKCP-52	Clip (500no.)
KKCP-14	Lock Clip
KKBK-06	Fixed bracket
KKBK-05	Adjustable bracket

* Refer to **Mounting accessories** on **Accessories** pages

Connection Accessories

CN67-4P-0300	IP67 4 PIN LEDmix male & female 300mm/11.81" pair
CN67-4P-1000	IP67 4 PIN LEDmix male & female 1000mm/39.37" pair
CN67-4P-3000	IP67 4 PIN LEDmix male & female 3000mm/118.11" pair

* Refer to **Power feed** on **Accessories** pages

Exterior Junction Boxes

KKJB-07	IP67 Slim J-Box
KKJB-07R	Potting Resin for IP67 Slim J-Box

* Refer to **Exterior Junction Boxes** on **Accessories** pages

PSU/Driver

0-10V/1-10V/DALI/DMX

* Refer to **Driver/PSU Options** page for details or provide requirement and KKDC to offer the suitable option

LED ENGINE VARIANTS (LED STRIP TYPE)

Colour	Output	LED	Lumen/m	Lumen/ft	W/m	W/ft	Spec Doc	Length	Increment
Single CCT	Low	352	340	103	5.5	1.67	MiMi 352	103.3-2020mm (4.07-79.53in)	83.3mm (3.28in)
	Mid	504	820	250	12.5	3.81	MiMi 504	120-2020mm (4.72-79.53in)	100mm (3.94in)
	Mid	508	1130	344	17.5	5.33	MiMi 508	91.4-2020mm (3.60-79.53in)	71.4mm (2.81in)
	Mid	007	620	189	10.9	3.32	MiMi 007	103.4-2020mm (4.07-79.53in)	41.7mm (1.64in)
	Mid	010	920	280	10	3.05	MiMi A010	97-2020mm (3.82-79.53in)	38.46mm (1.51in)
	Max	020	1840	561	20	6.10	MiMi A020	97-2020mm (3.82-79.53in)	38.46mm (1.51in)
	Mid	207	590	180	11	3.35	MiMi 207	103.3-2020mm (4.07-79.53in)	83.3mm (3.28in)
Warm Dim/Dynamic White	Mid	208	1000	338	15.6	4.75	MiMi 208	186.7-2020mm (7.35-79.53in)	166.7mm (6.56in)
RGB		501	Red 98 Green 210 Blue 35 RGB 305	Red 30 Green 64 Blue 11 RGB 93	15.6	4.75	MiMi RGB	103.3-2020mm (4.07-79.53in)	83.3mm (3.28in)

* Performance data: s-line, clear cover, 2100K + 5000K

MiMi 208

Length Availability List




Length Code		Fixture Length ¹		LED Strip ²		End Cap Dimension ³		Wattage (W)	Output (lm)
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		MIX (Test Data)
m0187	i0007	187mm	7.35in	167mm	6.56in	10mm	0.39in	2.60	166
m0353	i0014	353mm	13.91in	333mm	13.12in	10mm	0.39in	5.20	332
m0520	i0020	520mm	20.47in	500mm	19.69in	10mm	0.39in	7.80	498
m0687	i0027	687mm	27.03in	667mm	26.25in	10mm	0.39in	10.40	665
m0853	i0034	853mm	33.60in	833mm	32.81in	10mm	0.39in	13.00	831
m1020	i0040	1020mm	40.16in	1000mm	39.37in	10mm	0.39in	15.60	997
m1187	i0047	1187mm	46.72in	1167mm	45.93in	10mm	0.39in	18.20	1163
m1353	i0053	1353mm	53.28in	1333mm	52.49in	10mm	0.39in	20.80	1329
m1520	i0060	1520mm	59.84in	1500mm	59.06in	10mm	0.39in	23.40	1495
m1687	i0066	1687mm	66.41in	1667mm	65.62in	10mm	0.39in	26.00	1661
m1853	i0073	1853mm	72.97in	1833mm	72.18in	10mm	0.39in	28.60	1828
m2020	i0080	2020mm	79.53in	2000mm	78.74in	10mm	0.39in	31.20	1994

¹ Actual total overall length of light fixture (LED strip + end caps + void/wire hole)

² Actual length of PCB strip


³ Actual length of 2x end caps

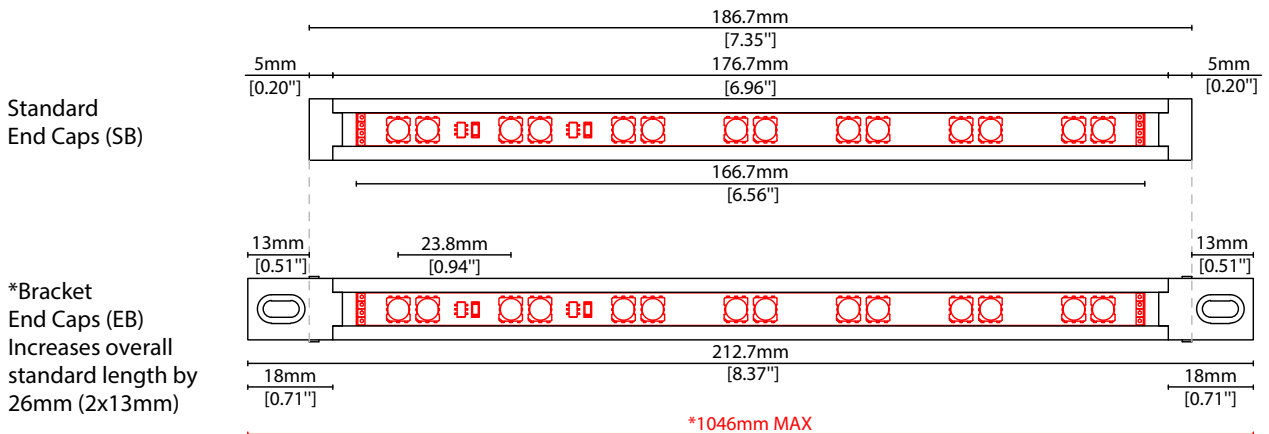


***IMPORTANT NOTE:**
 DUE TO POTENTIAL PROFILE 'SAGGING' THE MAX LENGTH AVAILABLE WITH END CAP BRACKETS IS 1046mm.

COVER OPTIONS


* Options are an integral part of the fixture ordering codes. Please refer to **Code Table** pages.




B Clear Cover
Polycarbonate
W13/H15mm (W0.51"/H0.59")



C Diffused Cover
Polycarbonate finish
W13/H15mm (W0.51"/H0.59")




CN Diffused Cover + Nano Louvre
Polycarbonate cover with anti-glare, 30° cut-off view angle
W13/H15mm (W0.51"/H0.59")



Y Black Clear Cover
Dark tinted translucent polycarbonate
60% light output
W13/H15mm (W0.51"/H0.59")

END CAP OPTION




EB End Cap Bracket (Pair)
Handrail installation
Compatible up to 1m/40"
L18/W13/H15mm
(L0.7/W0.51/H0.59")


POWER FEED OPTIONS

* Options are an integral part of the fixture ordering codes. Please refer to **Code Table** pages.


0300 S00A 300mm (11.81") Single \varnothing 4.3mm sheath tail




0300 D00A 300mm (11.81") Double \varnothing 4.3mm sheath tail



0300 S67A 300mm (11.81") Single \varnothing 4.3mm sheath IP67 connector

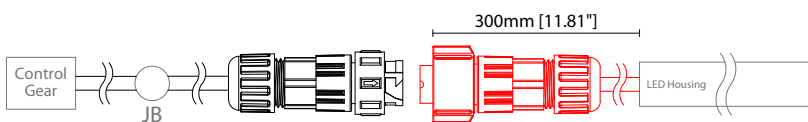


0300 D67A 300mm (11.81") Double \varnothing 4.3mm sheath IP67 connector

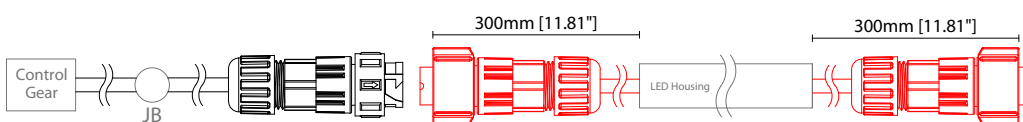


IP67 4 Pin Connector

Female connector
4 PIN (IP67)

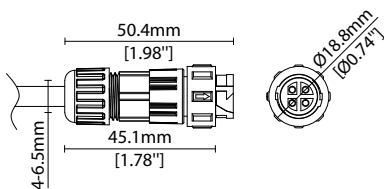

Male connector
4 PIN (IP67)

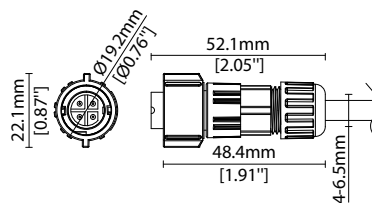


Key


- Control Gear Power supply, sub-controllers & control systems
- JB Junction box / cable connection

MOUNTING ACCESSORIES


Note: Accessories are to be ordered separately with corresponding code shown below.




KKCP-02 (1no.)
KKCP-52 (500no.)
 Clip (allow 3 per metre/40in)
 S/Steel finish
 L25/W16.7/H15.5mm
 (L0.98/W0.66/H0.61")



KKCP-14
 Lock clip (allow 2 per metre/40in)
 S/Steel finish
 L25/W14/H21mm
 (L0.98/W0.55/H0.83")



KKBK-06
 Fixed bracket (allow 3 per
 metre/40in)
 S/Steel finish
 L20/W29.1/H28.8mm
 L0.79/W1.15/H1.13"

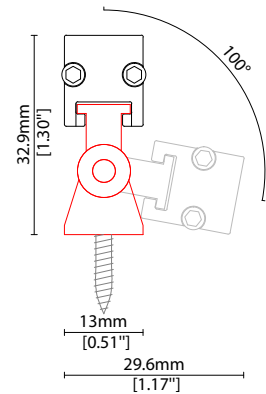

KKBK-05
 Adjustable bracket
 (allow 2 per metre/40in)
 S/Steel finish
 W13/H32.9mm
 W0.51/H1.3"

POWER FEED



CN67-4P-0300 300mm (11.81in) pair
CN67-4P-1000 1000mm (39.37in) pair
CN67-4P-3000 3000mm (118.11in) pair

IP67
 4 PIN male + female (RGB/LEDmix) connector set

EXTERIOR JUNCTION BOXES



KKJB-07

IP67 Slim J-Box
(including type A,B,C, D bushings)



KKJB-07R

Potting resin for IP67 Slim J-Box

KKDC CONTROL



IP20
Plastic housing
L170/W59/H29mm
(L6.69/W2.32/H1.14in)

KKDM-06 1-10V

visDIM dimmable sub-controller
(4 x 8A max @ 12-36V)



IP20
Plastic housing
L170/W53.4/H28mm
(L6.69/W2.10/H1.10in)

KKSC-05 DMX

visDIM dimmable sub-controller
(4 x 5A max @ 12-36V)



IP20
Plastic housing
L170/W59/H29mm
(L6.69/W2.32/H1.14in)

KKDL-02 DALI

visDIM dimmable sub-controller
(4 x 8A max @ 12-36V)



IP20
Plastic housing
L166/W53.4/H23mm
(L6.54/W2.10/H0.91in)

KKDL-03 DALI

visDIM dimmable sub-controller
(4 x 5A max @ 12-36V)

AVAILABLE PSU OPTIONS

Control Mode	PSU (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating
Switched	CEN-60-24	90-295V	24V	2.5A	60W	-	IP67
	HLG-60H-24	90-305V	24V	2.5A	60W	-	IP67
	HLG-100H-24	90-305V	24V	4.0A	100W	-	IP67
	HLG-150H-24	90-305V	24V	6.3A	150W	-	IP67
	HLG-240H-24	90-305V	24V	10A	240W	-	IP67
0-10V (1-10V)	PWM-40-24	90-305V	24V	1.67A	40W	100-0.15 (100-10)	IP67
	PWM-60-24	90-305V	24V	2.5A	60W	100-0.15 (100-10)	IP67
	PWM-90-24	90-305V	24V	3.67A	90W	100-0.15 (100-10)	IP67
	PWM-120-24	90-305V	24V	5.0A	120W	100-0.15 (100-10)	IP67
DALI	LIN100A1	120-277V	24V	1A per channel	100W	100-0.1	IP66/IP40
DMX RGB	LIN100A1	120-277V	24V	1.33A per channel	100W	100-0.1	IP66/IP40
DMX RGBW	LIN100A1	120-277A	24V	1A per channel	100W	100-0.1	IP66/IP40

Flicker Free Options - Combination of PSU+ sub-controller

Control Mode	PSU (Order Code)	Sub-controller (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating PSU/ Sub-controller
0-10V or 1-10V	CEN-60-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKDM-06	90-295V	24V	4.0A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKDM-06	90-295V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKDM-06	90-295V	24V	10.0A	240W	100-0.9	IP67/IP20
DALI	CEN-60-24	KKDL-02/03	90-295V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-60H-24	KKDL-02/03	90-305V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-100H-24	KKDL-02/03	90-305V	24V	4.0A	100W	100-0.1	IP67/IP20
	HLG-150H-24	KKDL-02/03	90-305V	24V	6.3A	150W	100-0.1	IP67/IP20
	HLG-240H-24	KKDL-02/03	90-305V	24V	10.0A	240W	100-0.1	IP67/IP20
DMX RGB	CEN-60-24	KKSC-05	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKSC-05	90-305V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKSC-05	90-305V	24V	4A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKSC-05	90-305V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKSC-05	90-305V	24V	10.0A	240W	100-0.9	IP67/IP20

¹ The items shown above cover the most frequently used specification but does not exhaust the possible options

² PSU and/or driver can be chosen from the table, or KKDC may recommend the best option upon receipt of the controls requirement and installation environment

³ Electrical shop drawing will include detailed information of PSU and relevant control drivers

⁴ Cut sheets are available on the controls section of www.kkdc.lighting or upon request