



MAGNUM Vanity
3-588-xxx

oxygen

FIXTURE TYPE _____ LOCATION _____
PROJECT _____ DATE _____

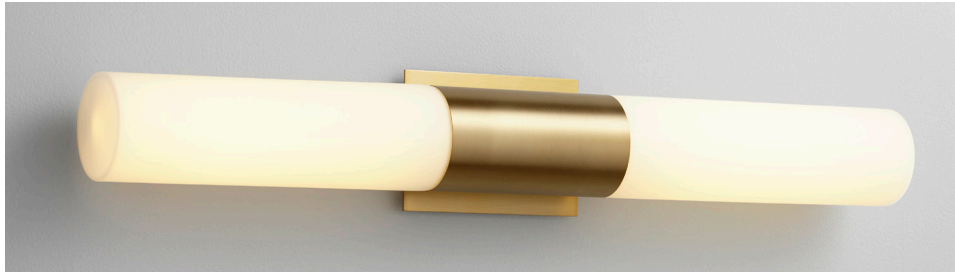

-40 Aged Brass

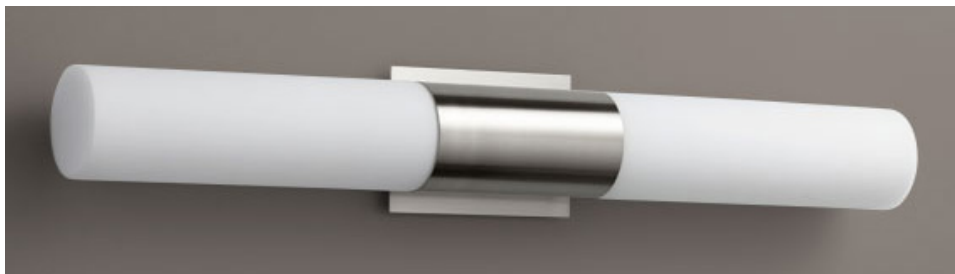

-24 Satin Nickel

Diffusers:




-1 White Opal Glass



- Matte White Acrylic

LIGHT SOURCE 2 x 12.1W LED, 3000K, CRI 90
LUMINAIRE POWER 28.7W at 120V
RATED LIFE 60000 hr RL
OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K
LUMEN OUTPUT Delivered: (-1) Glass: 2369 lm (LM-79)
 Acrylic: 2256 lm (LM-79)
INPUT VOLTAGE 120V to 277V AC, 50/60Hz
DRIVER OUTPUT 700mA, 29.4W max power
DIMMING TRIAC and ELV dimming at 120V AC;
 0-10V dimming, 100% to 1% current output
CONSTRUCTION Plated Steel and Acrylic or Glass
**DIFFUSER/
 METAL FINISHES** (-124) White Opal Glass/Satin Nickel
 (-140) White Opal Glass/Aged Brass
 (-24) Matte White Acrylic/Satin Nickel
 (-40) Matte White Acrylic/Aged Brass
MOUNTING 2" x 3" J-Box, 4" Octagonal J-Box,
 4" Square J-Box with a single device mud ring
STANDARDS UL Dry/Damp listed, ADA Compliant, CEC Title 24 Compliant,
 Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

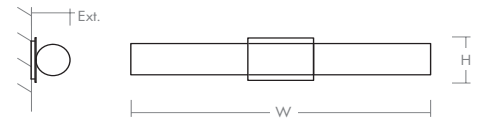

DIMENSIONS

W: 30.75"
H: 4.75"
Ext: 4.00"
M.C: 2.38" From top of fixture

Order example for standard fixture:

3-588-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-588-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

