


EHLWLEZU

Hazardous Location Exit Sign

STANDARD

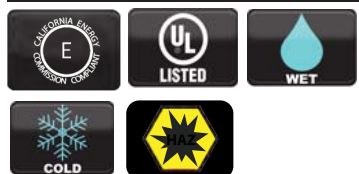

OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check-battery).
- Charge rate/power "ON" LED indicator light and magnetic test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Die-cast mounting brackets provided for surface wall-mount installation.
- Pre-installed conduit hub for conduit and pendant-mount installations.

HOUSING

- Housing is reinforced polycarbonate construction in gray finish.
- Corrosion-resistant enclosure with one piece, high-impact resistant, UV stabilized polycarbonate lens and molded gasket with stainless steel screws.
- EZ snap-out Chevron directional indicators.

ORDERING INFORMATION

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS					
EHLWLEZU										
	1	Single	R	Red	G	Gray	(blank)	AC-Only	SDT	Self-Diagnostics
	2	Double	G	Green			EM	NiCd Battery	TP	Temper Proof

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- TP: Tamper-proof hardware helps discourage unauthorized access to the unit.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- Meets UL924, UL844, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- IP66 rated for Ingress Protection.
- Rated for Class 1, Division 2, Groups A,B,C,D.
- UL listed for wet locations (-20°C – 50°C).
- Certified to CEC under Title 20 Regulations.

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120	277V		
EHLWLEZU-RED/GREEN/EM/SDT	3.0	3.0	0.03	0.02

DIMENSIONS

