

Fixture Number				
Project Title		Type		Qty
Comments				

- Slim Profile (4" High x 4" Wide)
- Extruded Aluminum Inside & Outside Walls
- Flat Matte White Acrylic Bottom Lens

Dimensions and Lamping:

C1044-24	24" A x 4" C x 4" D	Weight: 22 lbs.
LN	LED: Nominal 70W, 6050 Delivered Lumens	
C1044-36	36" A x 4" C x 4" D	Weight: 33 lbs.
LN	LED: Nominal 115W, 9750 Delivered Lumens	
C1044-48	48" A x 4" C x 4" D	Weight: 43 lbs.
LN	LED: Nominal 150W, 12850 Delivered Lumens	
C1044-60	60" A x 4" C x 4" D	Weight 53 lbs.
LN	LED: Nominal 190W, 16400 Delivered Lumens	
C1044-72	72" A x 4" C x 4" D	Weight 64 lbs.
LN	LED: Nominal 235W, 20150 Delivered Lumens	

LED Color Temperature:

35K	3500K	30K	3000K	40K	4000K
-----	-------	-----	-------	-----	-------

Control:

CLV: Integral Power Supply, 0-10V Dimming to 1%

Voltage:

1	120V	2	277V	MV	Multi-Volt
---	------	---	------	----	------------

Diffusers:

WM: Matte White Acrylic

Standard Finishes:



PAL	Aluminum	PSB	Satin Black	PRD	Traffic Red (RAL 3020)
PNL	Nickel	PBB	Brushed Brass	POR	Pure Orange (RAL 2004)
PBR	Bronze	PAB	Antique Brass	PYL	Traffic Yellow (RAL 1023)
PLB	Light Bronze	PHB	Hammered Bronze	PGR	Emerald Green (RAL 6001)
PMB	Medium Bronze	PHC	Hammered Copper	PBL	Signal Blue (RAL 5005)
PDB	Dark Bronze	PHS	Hammered Silver	STBD	To Be Determined
PRB	Oil Rubbed Bronze	PSG	Satin Gold		
PMW	Matte White	PPA	Patina		

Other Options:

REM Remote Emergency Power Supply



C1044 | Avalon

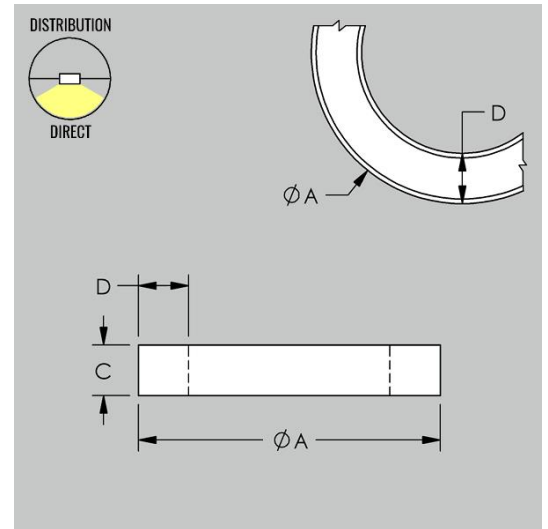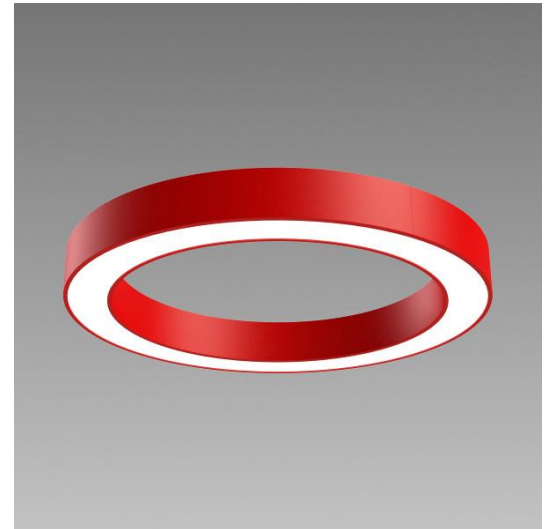

Notes:

- Custom sizes and finishes available upon request.
- Camman reserves the right to make design changes without prior notice.
- Mounting is to a 4 inch octagonal junction box.
- Photometric information is available at cammanlighting.com